# PCT

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04B 7/08	(11) International Publication Number: **WO 96/02984** (43) International Publication Date: 1 February 1996 (01.02.96)

A1

(21) International Application Number: PCT/SE95/00786

(22) International Filing Date: 27 June 1995 (27.06.95)

(30) Priority Data:
9402493-2   15 July 1994 (15.07.94)   SE

(71) Applicant (for all designated States except US): TELEFONAK-TIEBOLAGET LM ERICSSON [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor; and
(75) Inventor/Applicant (for US only): ÅKERBERG, Dag. E:son [SE/SE]; Ekhammarsvägen 23, S-196 31 Kungsängen (SE).

(74) Agents: BOHLIN, Björn et al.; Telefonaktiebolaget LM Ericsson, Patent Dept., S-126 25 Stockholm (SE).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.
In English translation (filed in Swedish).

(54) Title: A METHOD IN A DIVERSITY RECEIVER
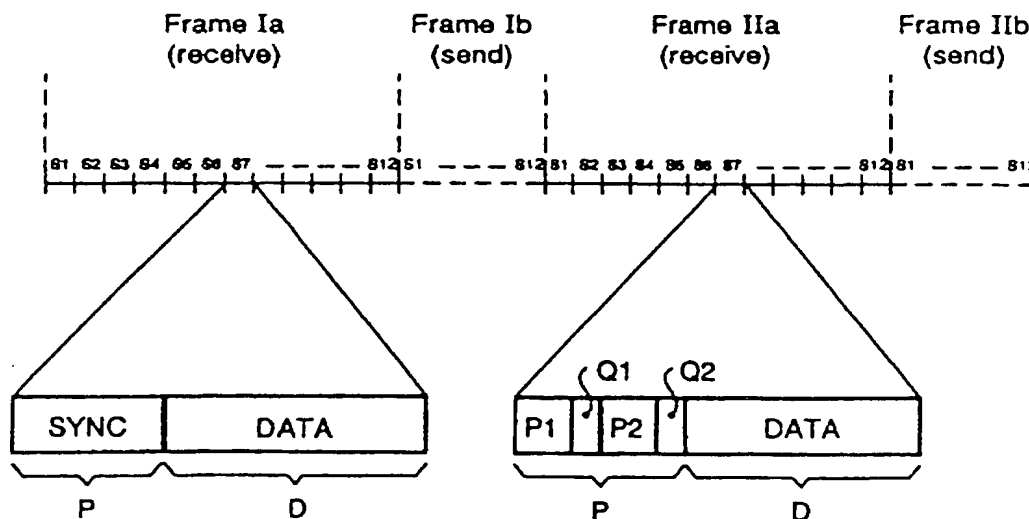
(57) Abstract

A method of selecting in a DECT-type radio communications system in which the mobile stations have antenna diversity, i.e. two antennas (A1, A2), that antenna which will provide the best reception quality (e.g. the smallest bit error rate). The radio system transmits the messages, which include a preamble, i.e. an introductory part (P), prior to the actual message information (D). This message preamble includes a specific bit pattern 01010101... and can be used to synchronize the receiver of the mobile station. According to the proposed method, the bit pattern is divided into two parts (P1 and P2). Upon receipt of the message, the first part (P1) is used to assess the reception quality of one antenna and the second part (P2) is used to assess the reception quality of the second antenna. The measured qualities are then compared and that antenna which is found to have the best reception quality is selected to receive the following information message (D).

A method in a diversity receiver

TECHNICAL FIELD

The present invention relates to a method of selecting an antenna from two (or possibly more) antennas available in a
5 diversity receiver. This diversity receiver may form part of a transceiver unit in a mobile station intended for a DECT-type radio system, i.e. for a cordless person communication system of relatively short range, although with the possibility of a mobile subscriber roaming over a large area.

10 ## DESCRIPTION OF THE PRIOR ART

The range between a base station and associated mobile stations is an essential criterion, particularly in systems of aforementioned kind, with regard to obtaining a cost-effective base station infrastructure and also with regard to
15 obtaining a broad coverage radio system.

The power of a transmitted radio signal is typically inversely proportional to the fourth power of the distance between the transmitter and the receiver. Thus, the area covered by the base station will be doubled with each 6 dB increase in
20 receiver sensitivity, therewith enabling the number of base stations required to cover a large given area to be reduced by 50%.

The total cost of the system can also be greatly reduced, by improving receiver sensitivity.

25 By sensitivity is meant here the minimum field strength at the receiver antenna which gives acceptable speech quality. For instance, there is described in "The Performance of DECT in the Outdoor 1.8 GHz Radio Channel" by L.B. Lopes and M.R. Heath, University of Leeds and BT Laboratories UK, a DECT

2

system which operates in accordance with the TDMA technique, in which the sensitivity limit is set to 1% burst error, i.e. only one burst in one-hundred may be in error (which is the same as saying that the so-called CRC error may be at most
5   1%).

The use of antenna diversity on the transmitter side or the receiver side will result in a marked improvement in sensitivity, with low cost in regard of typical fading environments in a radio system. Antenna diversity involves separating two
10   antennas in space or giving the two antennas different polarizations, so that a choice can be made between two radio paths, it being highly improbable that both paths will have a deep fading dip at one and the same time, i.e. that the signal strength will be low in both paths at one and the same time,
15   because of fading.

Figure 10 in the aforesaid reference shows that the antenna diversity can result in a sensitivity increase of 10 dB (at 1% CRC error probability).

The aforesaid reference also discloses that the antenna path
20   to be used is controlled by two different conditions. With one receiver for each of the two antennas, the control is performed after detection by comparing the quality of the two links for each burst, and data is selected from that link which had the best quality. A less costly implementation is to
25   have only one receiver together with a switch for the two antennas, wherein when the quality of a received burst is too poor, the receiver is switched to the other antenna for receiving the next burst.

In the DECT system described in the aforesaid reference, the
30   time lapse between two consecutive bursts is 10 ms. The time taken to decide that the old antenna is poor and to change to the other antenna is therefore 10 ms.

Figure 13 in the aforesaid reference shows that the simple diversity with a 10 ms switching delay is effective when mobile stations are stationary or move only very slowly. However, when the speed of the mobile station increases the

5   diversity gain may be lost, because the mobile station will travel so far during the 10 ms period that an estimation of the radio path will no longer be of any assistance. The more expensive 2-radio post selection diversity gives a sensitivity gain of 10 dB, irrespective of the speed at which the

10 mobile station moves.

SUMMARY OF THE INVENTION

The aforesaid decision time, 10 ms in the case of the DECT system, is relatively long and the propagation conditions (fading, time dispersion) for a quickly moving mobile station

15 are able to change during this period. It is, therefore, possible that the decision reached will be the wrong decision, meaning that detection of the actual information message will be made by the antenna which gives the poorer quality.

The present invention relates to a method of the kind defined

20 in the introduction which combines the aforesaid cost-effective method, according to which only one receiver is used in diversity reception, with the aforesaid two-receiver principle, which provides reception properties that are independent of speed.

25 According to the present invention, there is chosen a method of using a given predetermined control word, for instance a synchronizing word, immediately prior to the actual message that contains the information to be detected, in order to test which of the two antennas of the receiver is best suited for

30 this detection. This greatly improves the likelihood of the best antenna being chosen when receiving the message.

4

Thus, it is the object of the present invention to provide a
method of selecting or determining which of the two antennas
in a diversity receiver will provide the best reception of an
information message that immediately follows this determina-
5   tion or selection of the optimal antenna.

The inventive method is characterized by the method steps set
forth in the following Claims.

BRIEF DESCRIPTION OF THE DRAWING

The invention will now be described in more detail with
10   reference to the accompanying drawing, in which

Figure 1 is a block diagram illustrating a transmitter and a
receiver with diversity in a radio communication system; and

Figure 2 is a diagram which illustrates frames and time slots
and shows the configuration of messages transmitted in a TDMA
15   system, with the intention of explaining the inventive method.

BEST MODES OF CARRYING OUT THE INVENTION

Figure 1 is a block diagram illustrating a transmitter S and
a receiver M having diversity in a radio communication system,
for instance in a DECT system in accordance with the afore-
20   going.

The transmitter S may be included in the transmitter-receiver
unit of a base station and is comprised of known components
and circuits. The transmitter sends radio signals in accor-
dance with the TDMA principle, i.e. short bursts of control
25   information and message information within given time slots
in accordance with the following description. Each signal
time-divided in the transmitter S is comprised of a burst in
a given time slot intended for a given receiver, and the

5

bursts are transferred in a known manner, by suitable modula-
tion and by means of a carrier wave having a given allotted
frequency within the GHz range.

The receiver M is included in a mobile station which communi-
5   cates with or which shall communicate with the base station.
The receiver has two antennas A1 and A2, which, in the
illustrated case, are connected to only one detector unit in
the receiver M, by means of a switch SW. The receiver detector
is thus common to both of the antennas A1 and A2. The switch
10 SW is controllable and is switched between its two positions
by the detector unit in dependence on the quality of a burst
from the radio signals sent by the transmitter S, this quality
being determined by the detector unit. The bit error rate BER
of the detected bursts, the C/I ratio or some other known
15 measurement may be used as a quality determining factor.

Figure 2 is a time diagram over frames Ia, Ib, IIa, IIb... and
time slots S1...S12 within each frame that defines the so-
called physical channels in a TDMA system, in this case
particularly a DECT system. Transmission and reception for
20 both a base station and a mobile station are organized so that
each alternate frame is a transmission frame and each other
alternate frame is a reception frame. Each frame contains a
given number of time slots, in the DECT system 12 time slots
S1...S12. In the DECT system, the time interval of a transmis-
25 sion frame Ia and a reception frame Ib is 10 ms.

In the DECT system, a time slot, e.g. S7, is about 0.4 ms (24
time slots in a 10 ms frame). In order to obtain a radio link
which is essentially constant during the reception of a 0.4 ms
data packet, the distance travelled by a subscriber during the
30 0.4 ms period must be short in comparison with the distance in
space between the fading dips. The distance between the fading
dips is about 8 cm at 1.9 GHz, and short relative distances
are <10%, i.e. <8 mm. Thus, the movement speed shall be

6

maximum 20 m/s (72 km/h) in order for the subscriber not to
move further than 8 mm in the 0.4 ms period. The antenna
selection diversity is thus also effective in the case of
vehicle-carried DECT. Technology in which antenna selection

5   diversity shall be effective at a walking speed (1 m/s) may
therefore not receive on the same antenna for a period which
is greater than 8 ms (20 x 0.4 ms). In other words, the time
slot during which the same antenna is used for receiving
purposes must be shorter than 8 ms, otherwise the diversity

10 will only provide a gain for stationary reception, (in which
case the cheap standard diversity in DECT which provides no
gain when the subscriber moves might just as well be used,
(see from line 16 on page 2 to line 7 on page 3).

Transmission from the base station - reception in the mobile

15 station take place in the frame Ia, while a burst is received
in, e.g., time slot S7 within said frame, as shown in Figure
2.

Transmission from the mobile station and reception in the base
station take place in frame Ib. This is ignored in the present

20 case, however, which deals solely with transmission base
station-mobile station. The invention may, of course, also be
applied in this case in accordance with the same principle.

Transmission from the base station - reception in the mobile
station again takes place in frame IIa, similar to frame Ia,

25 although detection in the receiver is different, as made
evident below. Transmission and reception take place in frame
IIb, similar to frame Ib.

In the Figure 2 illustration, the transfer between the base
station and the mobile takes place in time slot S7, wherein

30 the mobile station will receive bursts from the base station
in time slot S7 in each frame Ia, IIa... until reception has
been terminated. However, handover can take place when a new

channel is chosen by or allocated to the mobile station,
whereafter the transfer may be made in a time slot other than
the earlier mentioned time slot S7. Channel allocation in the
DECT system is also dynamic, in other words the mobile station
5   chooses from the total number of available channels that
channel which is free at that moment in time and which has the
lowest signal interference ratio C/I.

Figure 2 shows a burst within a time slot S7. The burst
includes a preamble P which may have a length of 10 bits. This
10   is followed by the actual information part D. This division of
a message is generally known in the DECT system.

As is known, the message preamble P is used as a control
message or as a synchronizing word for the receiver, and more
particularly for its detector. A synchronizing word may
15   consist of alternate ones and zeros, for instance 01010101...
(10 bits). In this regard, the detector in the receiver M can
synchronize itself to the following data message D.

According to the present method, the synchronizing word is
divided into two parts P1 and P2 so as to enable the detector
20   in the receiver M to perform a quality measurement of the
signals from each of the two antennas A1 and A2 during a
respective time interval P1 and P2. An interval Q1 and Q2
between P1, P2 and between P2 and the data message D respec-
tively are also reserved for switching of the switch SW
25   between the two antennas A1, A2.

It is assumed initially that when reception is started after
channel allocation and activation in a known manner from the
base station transmitter in response to the reception and
detection of the synchronizing word, the switch will be
30   positioned so that antenna A1 is connected to the receiver
detector, as illustrated in Figure 2. The receiver detects the
incoming synchronizing word, in the present case

8

01010101..., during the whole of the interval P, with the
intention of ascertaining whether or not reception over the
chosen channel is at all possible. It may happen that recep-
tion over the chosen channel is poorer than if the receiver
5   had instead been set to receive over the antenna A2, although
in order for reception of the entire burst to be acceptable it
should be possible for the receiver to detect the synchroni-
zing word over the poorest antenna, since it is easier to
detect the synchronizing word correctly (gives less bit
10   errors) than it is to detect the subsequent data message. The
inventive method is not a method of solely detecting a message
by means of diversity, but a method of obtaining the best
possible quality of a detected message when receiving with
antenna diversity.

15   Thus, it is assumed in the following that the receiver has
detected the synchronizing word (01010101...) during the
interval P by means of the antenna A1, even though a connected
antenna A2 would have given a better detection result during
precisely the synchronization part of the signal (frame Ia).
20   The receiver detector has therewith detected the start time
point of the preamble P in each burst.

During the next reception frame IIa, time slot S7, the
receiver is still connected to the antenna A1 and the detector
therewith detects and measures the reception quality of the
25   synchronizing word received during the interval P1. Upon
completion of this procedure, the antenna A2 is connected to
the receiver detector for similar detection of the synchroni-
zing word, although this time during the interval P2. A given
small time interval Q1 can be reserved during the interval P
30   to enable switching of the antennas to be effected prior to
said detection procedure and to ensure that the antennas will
be switched at the correct instant with regard to the bit
pattern of the synchronizing word.

The receiver detector detects and determines the reception quality of the synchronizing word received during the interval P2 in accordance with the same criterion as that used to determine the reception quality of the synchronizing word received during the interval P1. A comparison of the two measured qualities is then made during an interval Q2, which has been reserved for this purpose and for possible switching of the switch SW back to the antenna A1.

If it is assumed that the reception qualities determined in the intervals P1 and P2 are respectively referenced QM1 and QM2, the comparison and decision are made in accordance with the following:

Antenna A1 is connected

If QM1 > QM2, no switching is made to antenna A2.

If QM1 < QM2, switching is made to the antenna A2 during the interval Q2.

Antenna A2 is connected

If QM1 > QM2, a switching is made to antenna A1 during the interval Q2.

If QM1 < QM2, no switching is made.

Thus, the conditions for proceeding in accordance with the inventive method are:

a)   The presence of a control method (synchronizing word) having a regular and specific bit pattern, so that division of the two intervals P1 and P2 can be made and so that equal determination of reception quality can be performed.

b) The presence of the control message at the beginning of the actual message that shall be received with improved reception quality.

The inventive method can also be applied with analog radio
5   systems having antenna diversity if the system transfers messages that have windows with short time intervals, where no traffic information is found. Such a window can, therefore, be used in accordance with the method to contain the two part intervals P1 and P2 in accordance with the aforegoing.

CLAIMS

1. A method of selecting a given antenna from two available antennas (A1, A2) in a diversity receiver which is included in a radio system and which is connected to the first (A1) of said antennas, wherein the radio messages to the receiver are transferred and received within a given time slot in mutually sequential frames (Ia, IIa...), wherein each message includes a preamble (P) and a data/information part (D), and wherein the preamble is comprised of a regular bit pattern (010101...) known to the receiver, **characterized** in that
   a) the radio receiver receives the preamble (P) over said first said antenna (A1) and determines or assesses the reception quality of said bit pattern during a first time interval (P1) of said message preamble;
   b) the radio receiver is switched (SW) to the second (A2) of said two antennas and determines or assesses the reception quality of said bit pattern during a second time interval (P2) of said message preamble (P); and
   c) the radio receiver compares the determined reception qualities and chooses the antenna that exhibited the highest reception quality to receive the data/information part (D) of said message.

2. A method according to Claim 1, **characterized** in that the criterion to be used in determining reception quality is established prior to determining the reception quality of said first and second parts of the message preamble and comparing these qualities, by virtue of being able to establish in the frame which precedes the frame in which said quality determination is effected the location of said message in a time slot, so that the method can be carried out.

3. A method according to Claim 1, **characterized** in that the message preamble is comprised of a synchronizing pattern which is intended for radio transmission and which is intended for

use in synchronizing the receiver to the information contained
in the transmitted message.

4. A method according to Claim 3, **characterized** in that said
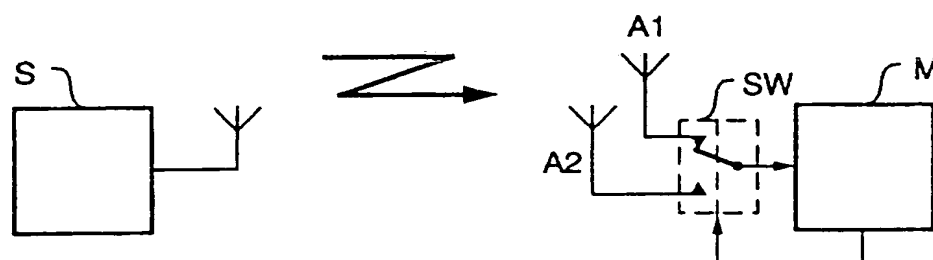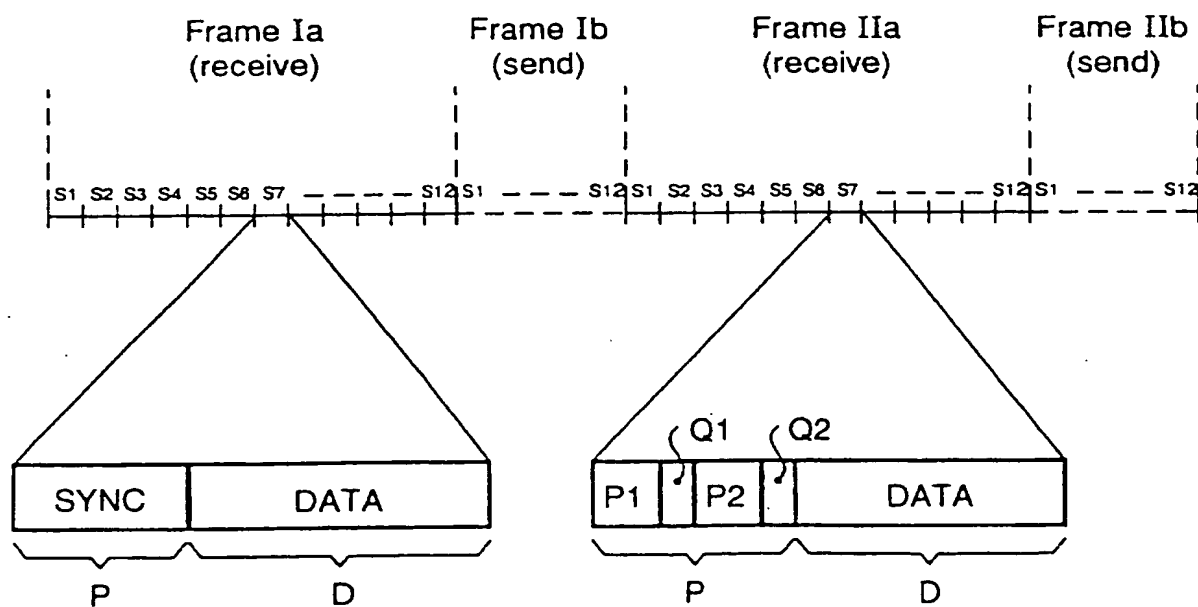synchronizing pattern is comprised of a sequence 010101....

Fig. 1

Fig. 2

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 95/00786

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 7/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9415411 A1 (MOTOROLA, INC.), 7 July 1994 (07.07.94), page 8, line 35 - page 9, line 9, figures 3,5,6, abstract	1,3,4,
Y		2
	--	
X	WO 9408404 A1 (NORTHERN TELECOM LIMITED), 14 April 1994 (14.04.94), page 3, line 4 - line 16, figures 5-6, abstract	1,3-4
Y		2
	--	

X	Further documents are listed in the continuation of Box C.		X	See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" erlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
29 November 1995	29 -11- 1995

Name and mailing address of the ISA/	Authorized officer
Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. + 46 8 666 02 86	Elisabet Aselius Telephone No. + 46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 95/00786

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim N
X	Patent Abstracts of Japan, Vol 12,No 423, E-680, abstract of JP, A, 63-158922 (NEC CORP), 1 July 1988 (01.07.88)	1,3,4
Y		2
	--	
Y	US 5020056 A (SANDEEP CHENNAKESHU), 28 May 1991 (28.05.91), see whole document	2
A		1,3-4
	--	
A	EP 0454585 A1 (NIPPON TELEGRAPH AND TELEPHONE PUBLIC CORPORATION), 30 October 1991 (30.10.91), abstract	1-4
	--	
A	WO 9410762 A1 (SIEMENS AKTIENGESELLSCHAFT), 11 May 1994 (11.05.94), abstract	1-4
	--	
A	WO 9410763 A1 (SIEMENS AKTIENGESELLSCHAFT), 11 May 1994 (11.05.94), abstract	1-4
	--	
A	WO 9410764 A1 (SIEMENS AKTIENGESELLSCHAFT), 11 May 1994 (11.05.94), abstract	1-4
	--	

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO-A1- 9415411	07/07/94	NONE		
WO-A1- 9408404	14/04/94	NONE		
US-A- 5020056	28/05/91	NONE		
EP-A1- 0454585	30/10/91	CA-C-	2041283	03/05/94
		DE-D,T-	69103196	23/02/95
		JP-A-	4010724	14/01/92
		JP-A-	6045970	18/02/94
		JP-B-	6103845	14/12/94
		US-A-	5203024	13/04/93
		JP-A-	4011415	16/01/92
		JP-A-	4011416	16/01/92
WO-A1- 9410762	11/05/94	NONE		
WO-A1- 9410763	11/05/94	NONE		
WO-A1- 9410764	11/05/94	NONE		